

# BRONZE SE SERIES IR ILLUMINATOR

## S-SE36-IR IR Illuminator

Deliver high power IR for CCTV & IP camera at night time and improve performance of camera to get clear pictures.



### Product Features



- Precise secondary optical technology

The latest LED technology assures outstanding performance of LED with excellent luminous efficiency and more uniform illumination

- Independent innovation of high efficiency power drive schemes

Low failure rate of products is guaranteed because of professional in-house optimized independent circuit technology widely used in our LED illuminators for more than 5 years

- High thermal conductivity aluminum

Excellent thermal management not only reduces excess heat and brightness decay of LED but also ensures efficient, reliable and continuous operation of LED throughout its lifetime as 50,000 hours.

- Energy saving technology

All illuminators has energy saving circuit with low electrical power consumption.

- Thinner and lighter design

Our patent owned housing is designed for simple installation and easy operation to reduce construction difficulty.

- Warranty period

3 year warranty

### Basic Function

- To improve performance of the weak light camera, thereby enhancing the picture effects at night.
- Conventional night monitoring
- The function of video analysis at night
- Reduce signal noise and other image distortion
- Reduce the network bandwidth requirements
- Energy saving by power factor correction
- Reduce the equipment cost
- Lower cost of installing and wiring
- Indoor and outdoor use

### Viewing picture at night




With IR light

Without IR light

# BRONZE SE SERIES IR ILLUMINATOR

## Picture

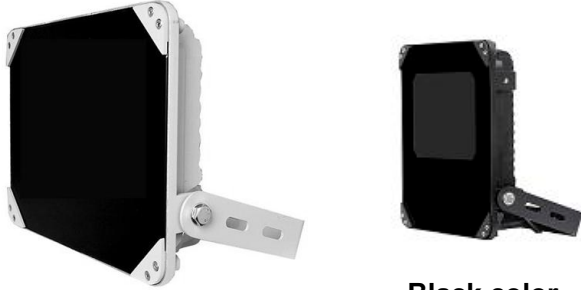

**Black color**


## Product Certificate



## Technical Specification

LED type: 36 pieces high power IR LED  
 Wavelength: 740nm/850nm/940nm  
 Beam angle: 15 to 120°  
 Beam distance: 300m to 75m(850nm)  
 Bracket: wall mount bracket  
 Working voltage: 85-265V AC/12-24V DC/24V AC  
 Cable: 1.3m(85-265V AC)/0.45m(12-24V DC/24V AC)  
 Power consumption: 60W(850nm)  
 Day/night switch: automatic  
 Working temperatures: -30 to 50°C  
 Protection level: IP66  
 Color: white/black  
 Panel: tempered glass panel+IR passing plastic  
 Housing: aluminum die-casting housing  
 N.W: 2.9KG  
 G.W: 3.2KG  
 Dimension: 261\*261\*90mm  
 Packing dimension: 290\*280\*140mm

## Drawing

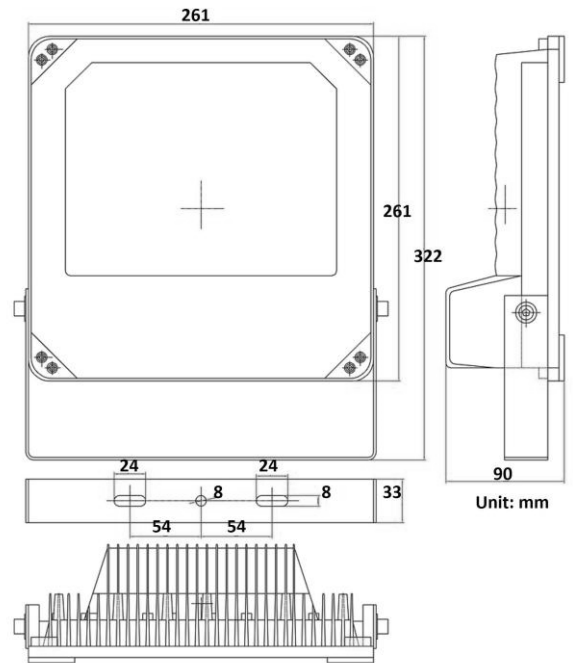

## Model for Selection

Model	Beam angle	IR distance (850nm)
S-SE36-15-IR	15°	300m
S-SE36-30-IR	30°	220m
S-SE36-45-IR	45°	130m
S-SE36-60-IR	60°	110m
S-SE36-90-IR	90°	90m
S-SE36-120-IR	120°	75m

\*IR distance is tested by Sony 1/3 CCD Camera.

To achieve the distance needed, please pay attention to your camera specification and lens before purchase. It is normal phenomenon that distance may vary due to different cameras and lens.