Camera Housing

www.infrared-ir.com

S-HZ60





Feature

- HZ60 camera housing is made of PC+PBT plastic alloy, with double-layer sun-shield and up-lifting cover structure with drop-protected rope inside.
- It has good explosion-proof and anti-corrosion functions and meets the requirements of IK10 explosion-proof and protection grade of IP68.
- The internal installation space is sufficient to install most IP cameras, CCTV cameras on the market, such as large intelligent traffic cameras and cameras with telephoto lenses can be installed.

Technical Specification


Outer size: L473mm*W190mm*H130mm

Window size: L128mm*H71mm

Internal space for camera: L380mm*W135mm*H90mm

N. W.: 2KG

Including transparent glass and camera holder

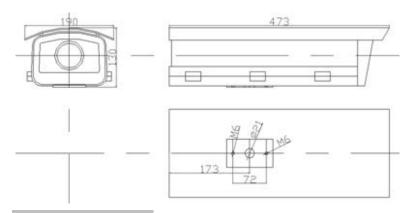

Bracket(optional)

Cable Management Bracket

Material: Aluminum alloy

Size: L250mm*W67*H40mm Base size: L120mm*W84mm

Angle of elevation: 65°, Angle of horizontal: 350°

N.W.: 0.8KG

